


Fire Extinguishant Extract Only Direct Driven Range

Bespoke Fire Extinguishant Gas Extract Units for Data or Server Rooms

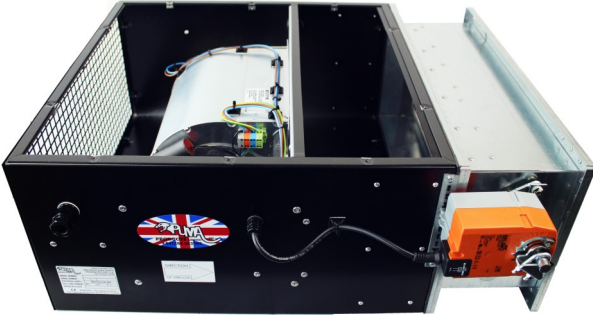


Internal Duct Mounted Unit

- Monocoque Construction - Single Skin
- Ral 9005 Satin Black Powdercoat Finish
- Top or Bottom Access Lid
- Vertical / Ceiling Mounting
- Internal flange duct connections
- Fully Sealed 2Hr Fire/Smoke Damper

Options and Accessories available on request

Weatherproof Roof Mounted Unit

- Channel & Tray Construction
- Single Skin Only
- RAL 5017 Mid Blue Powdercoat Finish
- Top Access Pitched Lid
- Weather cowl on Discharge
- Ducted Both Ends version available
- External flange duct connection

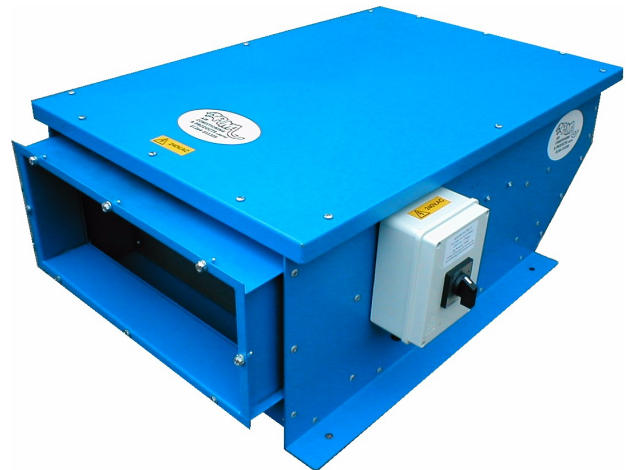

Fire Extinguishant Extract Units (denoted **FE**) models are selected for Electronic Data Processing areas (Computer Rooms) to extract harmful Fire Extinguishing Gases. Refer to BS ISO 14520 & BS EN 15004 Section 5.1

Fitted as standard with 2 Hr rated (BS 1634 - 1 - 2008) fully sealed Damper & Motor. (power open spring return).and a Single or Three phase, double inlet Direct Driven centrifugal fan.

Pre-wired to terminal block for Mains Supply and Volt Free Contacts for Air-flow Indication normally interlocking with Fire Detection Panel or BMS.

Ventilate your Environment with



Performance Data

Model Number	Duty in m3/sec @ given External Static Pressure (Pa)											
	0	50	75	100	125	150	200	250	300	350	400	450
200/200	0.1	0.09	0.08	0.08	0.07	0.07	0.06	0.05	0.01	-	-	-
200/250	0.12	0.11	0.1	0.095	0.09	0.085	0.08	0.07	0.06	-	-	-
200/300	0.15	0.14	0.13	0.125	0.12	0.11	0.1	0.09	0.085	0.06	-	-
250/400	0.2	0.2	0.18	0.17	0.16	0.15	0.13	0.1	0.07	-	-	-
250/600	0.27	0.26	0.25	0.24	0.23	0.22	0.21	0.19	0.17	-	-	-
300/1400	0.65	0.64	0.63	0.61	0.6	0.59	0.58	0.55	0.53	0.51	0.49	0.46
350/850	0.42	0.4	0.39	0.37	0.33	0.3	0.23	0.1	-	-	-	-
350/1000	0.53	0.48	0.43	0.4	0.38	0.31	0.24	0.1	-	-	-	-
350/1200	0.59	0.57	0.56	0.55	0.55	0.54	0.49	0.41	0.25	0.01	-	-
400/1800	0.95	0.9	0.89	0.89	0.89	0.88	0.83	0.81	0.76	0.68	-	-
450/2500	1.27	1.2	1.1	1.07	1.03	0.97	0.89	0.84	0.72	0.55	-	-
550/3600	1.8	1.72	1.6	1.55	1.5	1.43	1.35	1.15	0.89	-	-	-
550/3700	1.79	1.75	1.72	1.68	1.66	1.58	1.51	1.42	1.36	1.3	1.16	0.86
550/4500	2.1	2.05	1.92	1.85	1.8	1.7	1.6	1.25	1.0	-	-	-

For higher performances please ask about our **PENTAPOST BELT DRIVEN** Range

Typical Part Code:

W FE 250 / 400 - CM

Weatherproof

Ceiling Mounted

Fire Extinguishant Extract

Fan & Motor Size

Unit Size

*Over 30 years supplying the
Ventilation and Air Conditioning
Industry*



Electrical and Sound Data

Model Number	Motor Running Current (Amps)	Motor Starting Current (Amps)	Motor Power (Watts)	Induct Sound Power Levels dBW @ Octave Band Mid Frequency HZ								Breakout Noise Level dBA*	
				63	125	250	500	1K	2K	4K	8K	SSK	DSK
200/200	0.3	0.75	67	32	34	46	55	56	54	51	50	40	25
200/250	0.44	1.1	99	25	29	38	43	39	40	34	26	36	21
200/300	0.8	2.0	175	63	57	55	54	54	47	41	32	44	29
250/400	0.8	2.0	190	40	44	46	52	52	50	45	41	41	26
250/600	1.2	3.0	273	68	62	61	61	59	54	47	37	48	33
300/1400	7.6	19.0	1000	93	91	84	82	79	75	67	60	65	50
350/850	1.9	4.75	184	67	69	70	69	66	62	59	54	44	29
350/1000	2.3	5.75	300	71	72	73	72	70	66	62	57	48	33
350/1200	2.6	6.5	420	75	72	67	63	61	60	58	54	50	35
400/1800	4.2	12.5	550	76	74	66	64	60	57	49	41	53	38
450/2500	6.8	17.5	550	80	78	70	68	64	61	53	45	61	46
550/3600	4.3**	21.5**	1100	87	84	82	81	79	75	67	55	64	49
550/3700	4.7**	23.5**	1500	87	88	89	88	86	82	78	73	71	56
550/4500	4.5**	22.5**	1100	79	76	74	72	67	64	58	48	62	47


* The dBA quoted is the mean 'A' weighted sound pressure level measured at a distance of 3m. It is included for comparative

purposes only and the actual sound level experienced will depend on the acoustic characteristics of the area being served. Ductwork and Silencers also have a major influence on breakout noise and actual noise levels in the system.

** 380/415 V ac Three Phase Motor

Options and Accessories


- SSK** Single Skin
- DSK** Double Skin (25mm Insulated Panels)
- FSD** Fire / Smoke Damper & Motor
- TD** Telescopic Duct
- WL** Weather Louvre
- SIL** Silencer

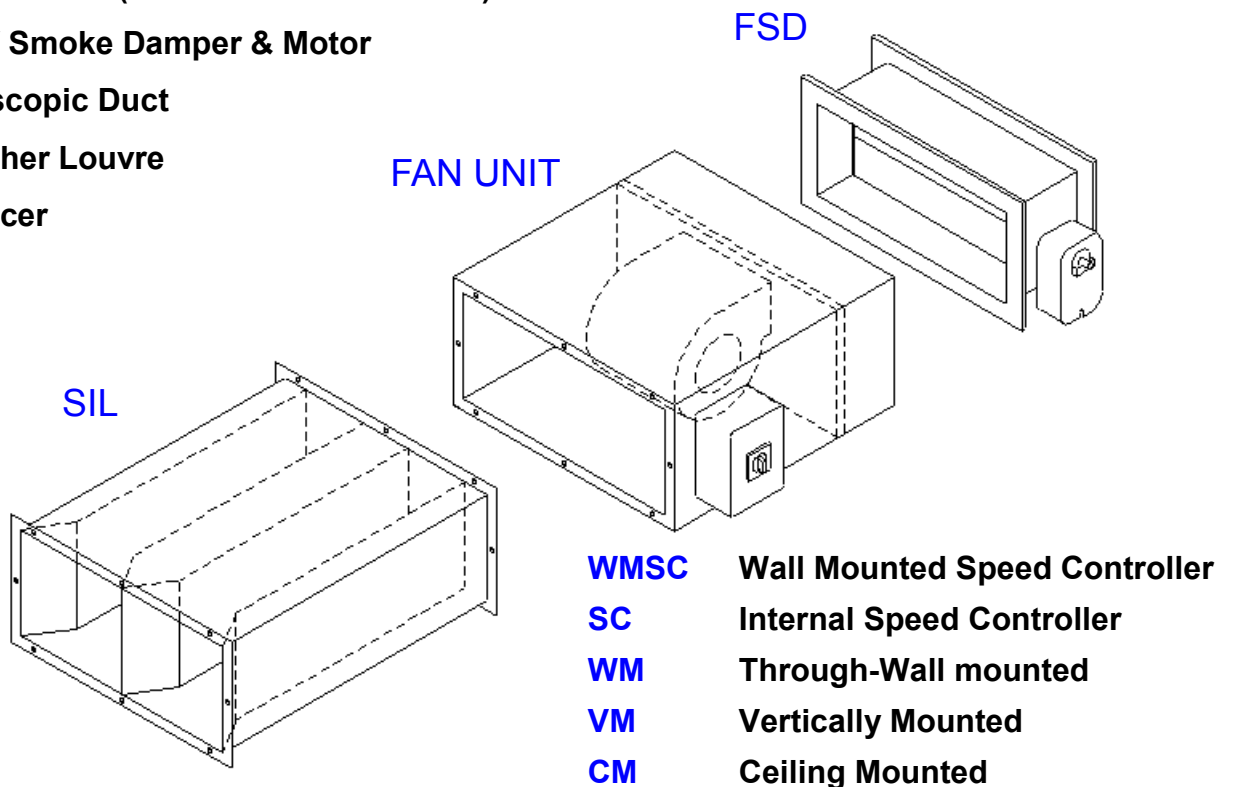


- WMSC** Wall Mounted Speed Controller
- SC** Internal Speed Controller
- WM** Through-Wall mounted
- VM** Vertically Mounted
- CM** Ceiling Mounted

Dimensional Data

Internal Duct Mounted Unit

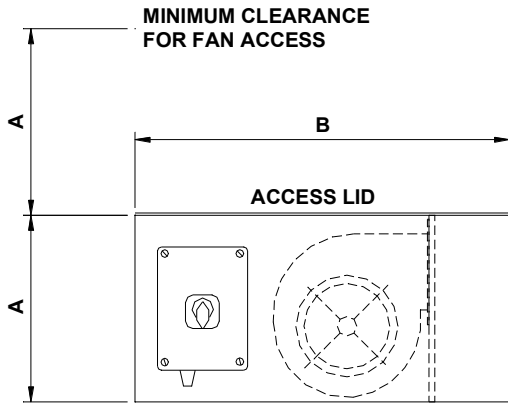


SIDE VIEW

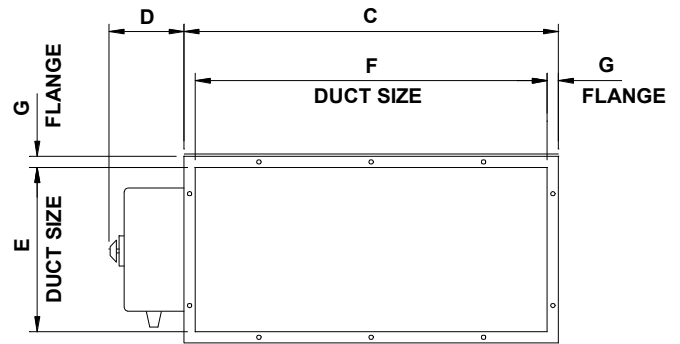


END VIEW (DISCHARGE)

Weatherproof Roof Mounted Unit

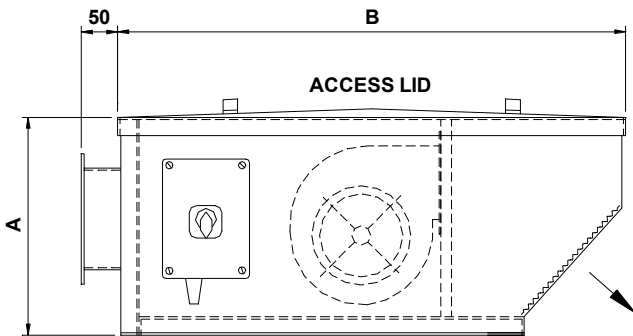

SIDE VIEW

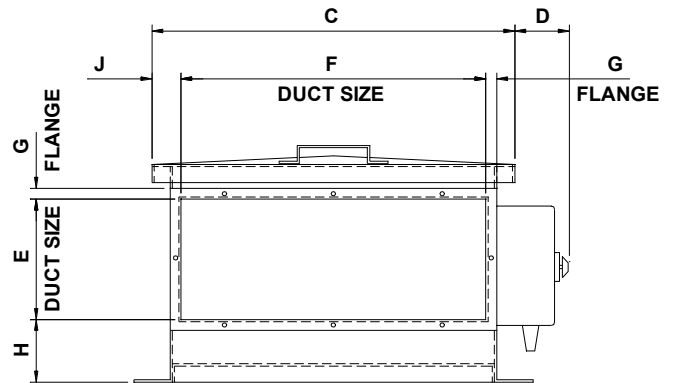

END VIEW (INTAKE)

Model Number	Dimensions In Millimetres											
	A		B	C		D*	E	F	G	H	J	WEIGHT
	SSK	DSK		SSK	DSK							
FE or PE 200	200	250	450	450	500	100	166	420	15	-	-	20 Kg
FE or PE 250	250	300	500	500	550	100	220	470	15	-	-	25 Kg
FE or PE 300	300	350	600	500	550	100	260	460	20	-	-	30 Kg
FE or PE 350	350	400	700	600	650	175	310	560	20	-	-	40 Kg
FE or PE 400	415	465	700	600	650	175	375	560	20	-	-	50 Kg
FE or PE 450	450	500	700	700	750	175	410	660	20	-	-	60 Kg
FE or PE 550	550	600	900	800	850	175	500	750	25	-	-	90 Kg
WFE or WPE 200	225	-	650	500	-	75	126	314	13	50	93	25 Kg
WFE or WPE 250	300	-	750	500	-	75	166	420	15	86	40	35 Kg
WFE or WPE 300	350	-	800	600	-	75	166	420	15	125	90	40 Kg
WFE or WPE 350	400	-	850	700	-	75	220	470	15	135	115	45 Kg
WFE or WPE 400	450	-	950	800	-	150	260	460	20	155	170	60 Kg
WFE or WPE 450	500	-	1000	800	-	150	310	560	20	120	120	70 Kg
WFE or WPE 550	600	-	1150	1000	-	150	375	560	20	195	220	100 Kg

Unit 6, Viscount Court, Walworth Industrial Estate, Andover,

Hampshire SP10 5NW England

www.pumaproducts.co.uk

Telephone: +44 (0) 1264 333305

Facsimile: +44 (0) 1264 333310

Email: sales@pumaproducts.co.uk



ISO 9001:2008

Certificate Number: 1206 Issue:01

